

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Attorney Docket No.
00169/P16954-02(I.S.Nakano)

Total Pages :

First Named Inventor or Application Identifier

Hiroshi MURAKAMI et al.

Express Mail Label No.:

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

Assistant Commissioner for Patents
ADDRESS TO: Box Patent Application
Washington, D.C. 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages -25]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total sheets -16]
4. ☒ Oath or Declaration [Total Pages -3]
- a.1. ☐ Newly executed (original or copy)
- a.2. ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference
(usable if Box 4b is checked)
The entire disclosure of the prior application, from which
a copy of the oath or declaration is supplied under Box
4b, is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449
☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s)
☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior Application No. PCT/JP98/03996

18. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK
2033 "K" Street, N.W.
Suite 800
Washington, D.C. 20006
Phone:(202) 721-8200
Fax:(202) 721-8250

March 7, 2000

jc713 U.S. PTO
09/520149
03/07/00

DESCRIPTION

PERMANENT MAGNET SYNCHRONOUS MOTOR

This application is a continuation-in-part application of International Application
PCT/JP98/03996, filed September 7, 1998, which is hereby incorporated by reference.

Technical Field

The present invention relates to permanent magnet synchronous motors, and particularly
relates to a permanent magnet synchronous motor having a stator with concentrated windings.

Background Art

A high power permanent magnet synchronous motor, in general, uses numbers of teeth
of a stator and employs a distributed winding method so that the composite magnetomotive force
of this motor can form approximately a sine wave. Permanent magnets of the rotor of this
synchronous motor employs magnets made of rare-earth featuring a high density of magnetic flux
as well as large withstanding force against demagnetization. Further a sensor detects rotational
phase of the rotor so that current phase can be controlled responsive to a rotor position.

However, the distributed winding method requires complicated winding processes, and
this lowers winding-efficiency. The rare earth magnet and the sensor detecting the rotational
phase are expensive, and these elements boost the cost of this motor.

An inexpensive permanent magnet synchronous motor is thus developed as shown in Fig.
17(a) in order to overcome the problems discussed above. Stator 21 is formed by cores 22 (refer
to Fig. 17(b)) divided corresponding to respective teeth. Teeth 26 of divided cores 22 are wound
with insulating paper 28, and coils are wound on top of that, thereby forming concentrated
winding coils 23. Divided cores 22 with the concentrated windings are incorporated into a ring
and fixed by welding, caulking or laser-beam-welding to form the stator having the concentrated
windings. Permanent magnets 25 of rotor 24 are made of inexpensive-ferrite magnet. Regarding
the current-phase control, a zero-cross point of an inductive voltage produced by a neutral coil
which allows no driving current to run through—is detected so that 120 excitation can be executed

by rectangular waveforms.

In this permanent magnet synchronous motor, $3n$ ($n = \text{a natural number}$) pieces of teeth of stator 21 are arranged with equal intervals and the teeth are coupled each other to form three phases through "Y" letter connecting method. Permanent magnets with $2n$ ($n = \text{a natural number}$) poles are arranged to face stator 21. As such, it is preferable to prepare $2n$ poles of permanent magnets for $3n$ pieces of teeth in the permanent magnet synchronous motor.

In the example shown in Fig. 17, a number of poles of rotor 24 is 8 poles ($2n, n = 4$), a number of stator teeth is 12 ($3n, n = 4$). Respective teeth are wound with coils $u1, v1, w1, u2, \dots, v4, w4$ sequentially. Each coil is connected in series as shown in Fig. 18(a) or in parallel as in Fig. 18(b) to form phases U, V and W.

Meanwhile, in an ordinary permanent magnet synchronous motor, the following relation is established so that leakage flux between each tooth can be reduced: $L_a > \text{approx. } 2 L_g$, (refer to Fig. 19)

where L_a is a clearance between teeth 26 and 26, and

L_g is an air gap between stator 21 and rotor 24.

Permanent magnets 25 have even thickness from an end to the other end in a circumference direction, and magnets 25 are arranged so that each end thereof faces with each other adjacently. However, if this structure is applied to the inexpensive permanent magnet synchronous motor as discussed above, the permanent magnets encounter local demagnetization due to the following reason, whereby a desirable output cannot be produced by the motor.

The reason is this: Since the motor employs the concentrated winding method, a tooth bears a different pole from that of its adjacent tooth, thereby increasing inductance. This situation allows the rotor to be subject to demagnetization. In particular, when the motor is in a sensor-less operation, the permanent magnets of the rotor tend to be demagnetized at starting or at out-of-sync condition. In other words, as shown in Fig. 20, stator coil 23 produces a pole counteracting a pole of permanent magnet 25 of rotor 24, and parts of magnetic field produced by coil 23 invade into permanent magnets 25 as demagnetizing magnetic field 27. When permanent magnets 25 are made of ferrite magnet, demagnetizing magnetic field 27 renders magnets 25 into break down condition. As a result, magnets 25 are demagnetized.

Numbers of motors with concentrated windings have been available in the market; however, a clearance between teeth is so narrow that the permanent magnets are subject to demagnetization when the polarities of adjacent teeth are opposite with each other. When the permanent magnet made of ferrite having small coercive force is used, the withstanding force against demagnetization becomes poor. When the motor is in the sensor-less operation in particular, reverse magnetic field is provably applied to the permanent magnets at starting or out-of-sync condition, thereby demagnetizing the permanent magnets with ease.

The present invention addresses the problems discussed above, and aims to provide a permanent magnet synchronous motor, in which the concentrated winding method is employed and yet the withstanding force of the permanent magnets against demagnetization is enhanced.

Summary of the Invention

In a permanent magnet synchronous motor of the present invention with a stator having concentrated windings, the following relation is established:

$$0.3 L_g < L_a \leq 2.0 L_g,$$

where L_a is a clearance between respective teeth,

L_g is an air gap between the stator and rotor.

Since the clearance between teeth is set at not more than two times of the air gap L_g , demagnetizing magnetic flux is restrained from flowing toward the rotor. Further when polarities of the coil and rotor oppose each other, the rotor magnets are not easily subjected to the demagnetizing magnetic field. As a result, the withstanding force against the demagnetization is enhanced. Meanwhile, when L_a is too small, the leakage magnetic flux between teeth becomes greater, and yet, edges of the stator may interfere with each other due to mold errors produced when divided cores are manufactured. Therefore, L_a is desirably greater than $0.3 L_g$.

Another relation such as $2 L_g < L_b < 5 L_g$ is established so that the demagnetizing magnetic flux can flow toward the teeth and can be restrained from flowing toward the rotor, where L_b is a depth of the stator edge and L_g is an air gap between the stator and rotor. As a result, the same effect as discussed above can be expected. Meanwhile, when L_b is too large, the leakage magnetic flux to be shorted grows too large, thereby lowering the motor output.

Therefore, L_b is desirably set at smaller than $5 L_g$. Further, when the two relations discussed above are satisfied, the greater withstanding force against demagnetization is obtainable.

In an edge of tooth of the stator, i.e., the edge of trailing side in the rotating direction of the rotor out of the edges of teeth opposing with each other, or both of these edges, the side facing the rotor is cut away so that an air gap on tooth edge can be enlarged, and this can restrain the demagnetizing magnetic flux from flowing toward the rotor. As a result, the same effect discussed above is obtainable. Further, in this case, at the edge where the rim side facing the rotor has been cut away, the other side to the rotor is protruded so that the depth of the tooth edge is maintained, and this can restrain the demagnetizing magnetic flux from running toward the rotor. As a result, the withstanding force against the demagnetization can be further enhanced. When the three conditions discussed above are satisfied, the greater withstanding force against the demagnetization is obtainable.

When the permanent magnets of the rotor are made of ferrite magnet, which is inexpensive than rare earth magnet and vulnerable to demagnetization, the structure discussed above can enhance the withstanding force of the inexpensive permanent magnets against the demagnetization. Therefore, an outstanding effect can be produced in this case. The stator formed by the divided cores realizes independent and efficient winding on respective divided cores before they are assembled into the stator. This can substantially increase the productivity and lower the cost. If this structure is applied to the motor driven by the sensor-less mechanism, an outstanding effect is expected because the sensor-less operation, in general, is vulnerable to demagnetization. In addition to the effects discussed above, when this permanent magnet synchronous motor is employed in compressors of air-conditioners or electric refrigerators, substantial effects are obtainable by lowering the costs of these appliances.

Brief Descriptions of Drawings

Fig. 1(a) is a cross section of a permanent magnet synchronous motor in accordance with a first exemplary embodiment of the present invention, and Fig. 1(b) is an enlarged view of an important part of the motor.

Fig. 2 is a graph illustrating a relation between the ratio of a slit clearance vs. an air-gap

between stator and rotor and a demagnetization rate.

Fig. 3 is an enlarged view of an important part of a permanent magnet synchronous motor in accordance with a second exemplary embodiment of the present invention.

Fig. 4 is a graph concerning the second embodiment and illustrating a relation between a ratio of a depth of a tooth edge vs. an air gap between stator and rotor and a demagnetization rate, and a relation between the same ratio and a torque rate.

Fig. 5 is an enlarged view of an important part of a permanent magnet synchronous motor in accordance with a third exemplary embodiment of the present invention.

Fig. 6(a) is a cross section of a permanent magnet synchronous motor in accordance with a fourth exemplary embodiment of the present invention, and Fig. 6(b) is an enlarged view of an important part of the motor.

Fig. 7 illustrates an operation of the fourth embodiment.

Fig. 8 is a cross section of a permanent magnet synchronous motor in accordance with a fifth exemplary embodiment of the present invention.

Fig. 9 illustrates a permanent magnet synchronous motor in accordance with a sixth exemplary embodiment, and Fig. 9(a) through Fig. 9(c) are cross sections of respective modifications, Fig. 9(d) is a cross sectional enlarged view of an important part shown in Fig. 9(a).

Fig. 10 illustrates a permanent magnet synchronous motor in accordance with a seventh exemplary embodiment, and Fig. 10(a) through Fig. 10(c) are cross sections of respective modifications, Fig. 10(d) is a cross sectional enlarged view of an important part shown in Fig. 10(a).

Fig. 11 is a cross sectional enlarged view of the modification shown in Fig. 10(c).

Fig. 12 illustrates an operation of the seventh embodiment.

Fig. 13 is a cross section of a permanent magnet synchronous motor in accordance with an eighth exemplary embodiment of the present invention.

Fig. 14 illustrates an operation of the eighth embodiment.

Fig. 15 illustrates an operation of a modification in the eighth embodiment.

Fig. 16 shows cross sectional views of embodiments other than the embodiments discussed above.

Fig. 17 illustrates a construction of a conventional permanent magnet synchronous motor, Fig. 17(a) is a cross section of the motor and Fig. 17(b) is a perspective view of a divided core of the motor.

Fig. 18 illustrates coil-couplings of the conventional motor.

Fig. 19 is a cross sectional enlarged view of an important part of the conventional motor.

Fig. 20 illustrates demagnetization in the conventional motor.

Fig. 21 illustrates a compressor used in an air-conditioner or an electric refrigerator.

Detailed Description of Preferred Embodiment

(Exemplary Embodiment 1)

The first exemplary embodiment of the present invention is demonstrated hereinafter with reference to Fig. 1 and Fig. 2.

In Fig. 1, stator 1 comprises divided cores 3 in a quantity corresponding to a number of slots. Teeth 4 of respective divided cores 3 are wound with coils (not shown) independently, i.e. the concentrated winding method is employed. Rotor 2 comprises rotor core 5 formed of laminated silicon steel sheet and permanent magnets 6 made of plurality of ferrite magnets, where magnets 6 are fixedly mounted to the outer wall of rotor core 5. A rotary shaft (not shown) extending through and fixed to the center of rotor core 5 is journaled by a bearing. Hollow cylinder 7 made of stainless steel sheet is fit onto the outer wall of rotor 2, or a reinforcing tape is wound around the outer wall so that necessary strength against centrifugal force is obtained.

The motor shown in the drawing has four pairs of polarity ($= n$), rotor 2 has eight permanent magnets ($= 2n$), and stator 1 comprises 12 pieces of divided cores 3 ($= 3n$). Regarding the current control of the coils wound on stator 1, a zero-cross point of an inductive voltage—produced by a neutral coil which allows no driving current to run through—is detected so that 120° excitation can be executed by rectangular waveforms. As illustrated in Fig. 1(b), teeth clearance L_a is set to meet the relation of $0.3 L_g < L_a \leq 2.0 L_g$,

where L_a = clearance between teeth 4 and 4,

L_g = air gap 8 between stator 1 and rotor 2.

Preferable values of L_g ranges 0.4 - 0.6 mm, and those of L_a ranges 0.3 - 1.2 mm.

In the construction discussed above, teeth clearance L_a between the adjacent teeth edges is set at not greater than two times of air-gap L_g . Therefore, this structure allows leakage flux to flow toward the adjacent teeth and thus restrains the leakage flux from flowing toward rotor 2. Even if the coil on stator 1 is at a position to counteract the polarity of rotor 2, the polarity of rotor 2 is difficult to be subject to demagnetization. The withstanding force of permanent magnet 6 on rotor 2 against the demagnetization is thus increased.

Fig. 2 illustrates a relation between L_a/L_g and a demagnetizing rate. In the conventional motor, L_a/L_g is set at greater than 2, and at that time, the demagnetization rate is greater than 1.5%, and this makes it difficult to produce an output. However, setting L_a/L_g at not greater than 2.0 lowers the demagnetization rate down to less than 1.5%, thereby obtaining the demagnetization rate practically needed. Since L_a is set at greater than 0.3 L_g , the leakage flux between teeth 4 and 4 does not grow too much. Further, there is no chance for stator 1 to be assembled with poor accuracy due to errors in mold of divided cores 3, for the errors could cause the teeth edges to interfere with each other.

Permanent magnets 6 made of ferrite magnets are less expensive than rare earth magnet. Indeed magnets 6 are vulnerable to demagnetization, but the withstanding force against demagnetization can be increased as discussed above. Stator 1 is formed of divided cores 3, and then individual divided cores 3 can be wound independently and efficiently before being assembled into stator 1, and this structure dramatically improve the productivity of stator 1. As a result, the cost can be substantially reduced.

(Exemplary Embodiment 2)

A permanent magnet synchronous motor in accordance with the second exemplary embodiment is demonstrated hereinafter with reference to Fig. 3 and Fig. 4. The like elements used in the first embodiment bear the like reference marks, and the descriptions thereof are thus omitted here.

As illustrated in Fig. 3, L_a and L_b are set to meet the relations of:

$$0.3 L_g < L_a \leq 2.0 L_g, \text{ and } 2 L_g < L_b < 5 L_g,$$

where L_a = clearance between teeth 4 and 4,

Lb = depth of edge of tooth 4 of stator 1,

Lg = air gap 8 between stator 1 and rotor 2.

In the construction discussed above, in addition to the arrangements done in the first embodiment, tooth depth Lb is set at greater than two times of air-gap Lg, thereby further restraining the leakage flux from flowing toward rotor 2. As a result, the withstanding force against the demagnetization can be increased. Since Lb is set at less than 5 Lg, the leakage flux shorting between teeth 4 and 4 does not grow too much, and thus the motor output has no chance to lower.

Fig. 4(a) and Fig. 4(b) illustrate the relation between Lb/Lg and demagnetization rate, and the relation between Lb/Lg and torque rate, in both cases La/Lg takes 1 (one). As shown in Fig. 4(a), the demagnetization rate decreases at a greater value of Lb/Lg, and as shown in Fig. 4(b) the torque rate decreases at the greater value of Lb/Lg. Thus Lb/Lg is set at greater than 2 thereby reducing the demagnetization rate, and Lb/Lg is set at less than 5 thereby preventing the torque from lowering.

The depth Lb of edges of teeth 4 of stator 1 is set at a greater value as discussed above, and even this arrangement only can also produce some effect.

(Exemplary Embodiment 3)

A permanent magnet synchronous motor in accordance with the third exemplary embodiment is demonstrated hereinafter with reference to Fig. 5.

In Fig. 5, in addition to the arrangements done in the second embodiment shown in Fig. 3, parts of the edges facing with each other of the adjacent teeth 4 and 4 are cut away on their rim sections facing rotor 2, and the cut-away section is called open space 9. (A clearance between tooth edge 4 and rotor 2 is referred to as Lc.)

Open space 9 can be provided only on the edge of trailing side in the rotating direction of the rotor 2 out of the edges of teeth opposing with each other.

The air gap on the edges of teeth 4 can be enlarged by providing open space 9, and this can restrain the demagnetizing magnetic flux from flowing toward the rotor. As a result, the same effect is obtainable.

At the edge of tooth 4 where the rim side facing the rotor 2 has been cut away, the other side to the rotor 2 is protruded so that the depth of the tooth edge is maintained, and this can restrain the demagnetizing magnetic flux from running toward rotor 2. As a result, the withstanding force against the demagnetization can be further enhanced.

Open space 9 simply provided on the edge of teeth 4 can also produce some effect.

(Exemplary Embodiment 4)

A permanent magnet synchronous motor in accordance with the fourth exemplary embodiment is demonstrated hereinafter with reference to Fig. 6 and Fig. 7. In the previous embodiments 1 - 3, the shape of teeth 4 of stator 1 is modified, thereby restraining the demagnetizing magnetic flux from flowing toward rotor 2. In the following embodiments, demagnetizing magnetic flux—traveling through rotor 2—is modified so as not to travel through permanent magnets 6, so that withstanding force against demagnetization is increased.

In Fig. 6, open spaces 11 are formed on both edges of respective permanent magnets 6, where the edges on the outer rim side are used for open spaces 11. Each open space 11 is defined as shown in Fig. 6(b): Opening angle "Am" of space 11 with regard to the rotor center is set to meet this relation;

$$(1/10)As < Am < (1/4)As$$

where "As" is an opening angle of tooth 4.

This structure, i.e. providing open spaces 11 on both edges of permanent magnet 6, allows demagnetizing magnetic field 12 to travel through open spaces 11 even if demagnetization magnetic field 12 protruding toward rotor 2 is produced between the edges of adjacent teeth 4. Therefore, demagnetization magnetic field 12 does not demagnetize permanent magnet 6, and the withstanding force against the demagnetization of magnet 6 is thus increased. When "Am" is less than $(1/10)As$, the effect discussed above cannot be produced, and when "Am" is greater than $(1/4)As$, the motor produces lower output or greater cogging torque.

(Exemplary embodiment 5)

A permanent magnet synchronous motor in accordance with the fifth exemplary embodiment is demonstrated hereinafter with reference to Fig. 8. In embodiment 4, magnet 6 having the inner wall with an even depth with regard to the arc around the shaft center of rotor 2 is used. In this fifth embodiment, magnet 6 having the inner wall with a flat face 13 is used. This structure increases the depth of center part of magnet 6 in the rim direction, thereby increasing withstanding force at the center of magnet 6 against demagnetization.

(Exemplary Embodiment 6)

A permanent magnet synchronous motor in accordance with the sixth exemplary embodiment is demonstrated hereinafter with reference to Fig. 9. In the previous embodiments 4 and 5, permanent magnets 6 are mounted on the outer wall of rotor core 5, thereby forming rotor 2. In the following embodiments including this sixth embodiment, permanent magnets 6 are buried in rotor core 5.

In Figs. 9(a), 9(b) and 9(c), open spaces 11 are formed on both edges of permanent magnet 6, where the edges on the outer rim side are used for spaces 11. This magnet 6 is buried in rotor core 5 along its outer rim. Further, as shown in detail in Fig. 9(d), cut-away sections 14 are recessed into the outer wall of rotor core 5 so that the recessed positions can correspond to respective open spaces 11. Permanent magnets 6 shown in Fig. 9(a) have an even depth with regard to the arcs around the rotor center. Permanent magnets 6 shown in Fig. 9(b) have a flat face 13 on their inner wall facing the radial direction of the rotor, so that each magnet 6 has a greater depth at its center. Fig. 9(c) illustrates rotor 2 having four poles, where each permanent magnet 6 has an inner wall shaping an arc with regard to the rotor center and an outer wall shaping another arc with regard to a center eccentric from the rotor-core-center outwardly in the radial direction. This another arced face 15 is protruded and both end sections of face 15 taper into radial direction, so that both the end sections function as open spaces 11.

In this embodiment, open space 11 or an equivalent section functioning as same as open space 11 is formed on both ends of each permanent magnet 6, so that the same effect is produced as the previous embodiments 4 and 5 did. Further, since this embodiment adopts interior magnets

6, if the outer wall of rotor core 5 is left as it forms circular, ferromagnetic exists outside the open space 11 or the equivalent section whereby leakage magnetic-flux travels through this ferromagnetic and shorts the magnetic circuit. However, cut-away section 14 is provided in this embodiment, and this prevents the leakage magnetic-flux from being shorted. As a result, this structure prevents, without fail, the motor from lowering its efficiency.

(Exemplary Embodiment 7)

A permanent magnet synchronous motor in accordance with the seventh exemplary embodiment is demonstrated hereinafter with reference to Fig. 10 through Fig. 12. The previous embodiment 6 describes the example of forming cut-away section 14 corresponding to open space 11. In this embodiment, as shown in Fig. 10(a) through Fig. 10(c), the outer wall of rotor core 5 forms a cylindrical face, and as Fig. 10(d) illustrates in detail, slit 16 is formed at the place where open space 11 would have been provided. Slit 16 can be hollow; however, it can be filled with resin or non-magnetic metal in order to maintain the strength of rotor 2.

Permanent magnets 6 shown in Fig. 10(a) have an even depth with regard to the arcs around the rotor center. Permanent magnets 6 shown in Fig. 10(b) have a flat face 13 on their inner wall facing the radial direction of the rotor, so that each magnet 6 has a greater depth at its center. Fig. 10(c) illustrates rotor 2 having four poles, where each permanent magnet 6 has an inner wall shaping an arc with regard to the rotor center and an outer wall shaping another arc with regard to a center eccentric from the rotor-core-center outwardly in the radial direction. This another arced face 15 is protruded and both end sections of face 15 taper into radial direction, so that both the end sections function as open spaces 11.

Permanent magnets 6 shown in Fig. 11 is modified from magnet 6 shown in Fig. 10(c) in this way: inner wall facing the radial direction forms an arced face 17 having the same eccentric center as arced face 15.

In this embodiment, opening angle "Am" of slit 16 is set to meet this relation;

$$(1/10)As < Am < (1/4)As,$$

where "As" is an opening angle of tooth 4.

An opening angle of the space where slit 16 does not exist is set at about equal to the opening

angle of tooth 4, i.e. within the range of $(1.0 - 1.4)A_s$.

This structure, i.e. cut-away section 14 is replaced with slit 16, produces the same effect as the embodiment 6 does as illustrated in Fig. 9. When the opening angle "Am" of slit 16 is less than $(1/10)A_s$, the effect discussed above cannot be produced, and when "Am" is greater than $(1/4)A_s$, the motor produces lower output or greater cogging torque.

(Exemplary Embodiment 8)

A permanent magnet synchronous motor in accordance with the eighth exemplary embodiment is demonstrated hereinafter with reference to Fig. 13 through Fig. 15. In this embodiment, permanent magnet 6 to be buried into rotor 2 has its curvature-center outside rotor 2 in radial direction, i.e. a reversely arced permanent magnet 18 is used as shown in Fig. 13. Magnet ends facing the outer rim of rotor 2 are situated inside the rotor with an appropriate distance from the outer rim, and slit 16 is formed in rotor core 5 so that each end of magnet 18 can face slit 16.

As shown in Fig. 14, the relation of $L_g < Q < 3 L_g$ is established,

where Q = distance between the end of permanent magnet 18 and the outer rim of rotor core 5; and

L_g = air gap between stator 1 and rotor 2.

If Q is less than L_g , demagnetizing magnetic flux is not substantially blocked from traveling to permanent magnet 18. If Q is greater than $3 L_g$, the magnetic field produced by magnet 18 is weakened, so that the motor produces lower output or greater cogging torque due to abrupt change of the magnetic field. An opening angle "Am" of slit 16 with regard to rotor center-angle "Am" being over an end of permanent magnet 18 is set to meet this relation;

$$(1/10)A_s < A_m < (1/4)A_s$$

where "As" is an opening angle of tooth 4.

When the opening angle "Am" of slit 16 is less than $(1/10)A_s$, the effect discussed above cannot be produced, and when "Am" is greater than $(1/4)A_s$, the motor produces lower output or greater cogging torque.

Fig. 13 and Fig. 14 illustrate an example where slit 16 is formed within the outer rim of rotor core 5. Slit 16 can be replaced with cut-away section 19 as shown in Fig. 15. In this case, a size of cut-away section 19 is determined in the same manner as discussed above.

5 (Exemplary Embodiment 9)

Motor 31 comprises stator 1, rotor 2 and permanent magnet 6 disposed to rotor 2. The construction of motor 31 can be the same as those used in embodiments 1 through 8.

Motor 31 and compressor 32 are disposed in airtight container 33. Accumulator 35 is added to sucking pipe 34 of compressor 32, and discharging pipe 36 is disposed at an upper section of container 33. The compressor is thus made up. The compressor of the present invention is realized at a low cost and benefited from the advantages of the motor of the present invention because the advantages of the motor 31 described in the previous embodiments can be used.

Fig. 16 illustrates embodiments of rotors having interior-permanent-magnets other than the embodiments discussed above. Fig. 16(a) and Fig. 16(b) illustrate the embodiment modified from the embodiment 8 regarding the opening angle and shape of slit 16. The embodiment shown in Fig. 16(c) uses permanent magnet 6 made of plate-type magnet 6a. Fig. 16(d) illustrates permanent magnet 6 comprising reversely arced permanent magnets 18a and 18b disposed in multistage, parallel with each other, in the radial direction. Slits 16 are formed at respective ends of reversely arced permanent magnets 18a and 18b. Fig. 16(e) illustrates an embodiment where permanent magnet 6 is formed of a pair of plate-type magnets 6b, the pair plates form an angle tapering outward in the radial direction. Fig. 16(f) illustrates an embodiment where reversely arced permanent magnets 18 are used. Rotor core 5 comprises rotor core body 5a and rotor core cap 5b. Rotor core body 5a arranges magnets 18 to surround body 5a and forms star-like shape in cross sectional view. Rotor core cap 5b and body 5a hold magnet 18 in between. Hollow thin-cylinder 7 is fit to outer wall of rotor core 5 thereby maintaining the strength against centrifugal force. Slit 16 is formed at a place surrounded by the end of body 5a, end of cap 5b and cylinder 7.

The embodiments previously discussed describe the permanent magnet synchronous motor in a sensor-less operation; however, those embodiments can be applied to the motor having a sensor with the same effect, i.e. demagnetization is restrained.

5 Industrial Applicability

In a permanent magnet synchronous motor of the present invention with a stator having concentrated windings, the following relation is established:

$$0.3 L_g < L_a \leq 2.0 L_g,$$

where L_a is a clearance between respective teeth,

L_g is an air gap between the stator and rotor.

Since the clearance between teeth is set at not more than two times of the air gap L_g , demagnetizing magnetic flux is restrained from flowing toward the rotor. Further when polarities of the coil and rotor oppose each other, the rotor magnets are not easily subjected to the demagnetizing magnetic field. As a result, the withstanding force against the demagnetization is enhanced.

Another relation such as $2 L_g < L_b < 5 L_g$ is established so that the demagnetizing magnetic flux can flow toward the teeth and can be restrained from flowing toward the rotor, where L_g is an air gap between the stator and rotor. As a result, the same effect as discussed above can be expected. Further, when the two relations discussed above are satisfied, the greater withstanding force against demagnetization is obtainable.

In an edge of tooth of the stator, i.e., the edge of trailing side in the rotating direction of the rotor out of the edges of teeth opposing with each other, or both of these edges, the side facing the rotor is cut away so that an air gap on tooth edge can be enlarged. This can restrain the demagnetizing magnetic flux from flowing toward the rotor. As a result, the same effect discussed above is obtainable. Further, in this case, at the edge where the rim side facing the rotor has been cut away, the other side to the rotor is protruded so that the depth of the tooth edge is maintained, and this can restrain the demagnetizing magnetic flux from running toward the rotor. As a result, the withstanding force against the demagnetization can be further enhanced. When the three conditions discussed above are satisfied, the greater withstanding force

against the demagnetization is obtainable.

When the permanent magnets of the rotor are made of ferrite magnet—inexpensive than rare earth magnet and vulnerable to demagnetization—the structure discussed above can enhance the withstanding force of the inexpensive permanent magnets against the demagnetization. Therefore, an outstanding effect can be produced in this case. The stator formed by the divided cores realizes independent and efficient winding on respective divided cores before they are assembled into the stator. This can substantially increase the productivity and lower the cost. If this structure is applied to the motor driven by the sensor-less mechanism, an outstanding effect is expected because the sensor-less operation, in general, is vulnerable to demagnetization. In addition to the effects discussed above, when this permanent magnet synchronous motor is employed in compressors of air-conditioners or electric refrigerators, substantial effects are obtainable by lowering the costs of these appliances.

In the permanent magnet synchronous motor having a stator of the concentrated winding method and allowing its current-phase to be controlled in a sensor-less manner, the withstanding force against the demagnetization can be increased by the following method: Both ends of the permanent magnet buried inside the rotor along its rim are tapered at their outer wall toward inside in the radial direction and thus form recessed section. Therefore, when the coil counteracts the polarity of the rotor and then the adjacent teeth produce demagnetizing field between the teeth toward the rotor, the permanent magnet is not easily subjected to the demagnetizing field.

In that case, an opening angle of the recessed section with regard to the rotor center is referred to as " A_m ", and an opening angle of stator teeth is referred to as " A_s ", then " A_m " is set at greater than $(1/10)A_s$, thereby producing the same effect discussed above. When " A_m " is set at less than $(1/4)A_s$, the motor is restrained from producing the lower output due to lower utilization factor of magnetic flux produced by the permanent magnet as well as from producing the greater cogging torque.

An inner face of the permanent magnet directing the radial direction forms a flat face so that the depth at the center of the magnet becomes greater. As a result, the withstanding force of the magnet center against the demagnetization further increases.

In the case that the permanent magnets are mounted on the outer wall of the rotor core, the recessed sections are formed at the place corresponding to respective open spaces which are produced by cutting away both the ends of the permanent magnet in the rim direction. This structure—can be realized through simple processes—allows the motor to increase the withstanding force against demagnetization, prevent the lower output and restraint cogging torque.

In the case that the rotor uses interior permanent magnets, i.e. the magnets are buried in the rotor core along its rim, cut-away sections or slits are formed at the place corresponding to both edges, of the permanent magnet. These cut-away sections or slits can thus prevent the leakage magnetic flux from traveling through a place of the rotor core made of ferromagnetic material, the place corresponding to the recessed section, and thus shorting of the place can be avoided. As a result, this structure allows the motor to avoid lowering the efficiency without fail.

In the case of the interior permanent magnets buried in the rotor core along its rim, and the magnet has its curvature center outside of the rotor in the radial direction and forms a reverse arc, the same effect as discussed above is obtainable through the following method: Both the ends of the permanent magnet are situated inside of the rotor rim, where the ends of magnet face to the rotor rim, and cut-away sections or slits are formed on the rotor core at the place facing to those ends.

In that case, a distance between the end of permanent magnet and the outer rim of rotor is referred to as "Q", and an air-gap between stator and rotor is referred to as "Lg". "Q" is set at greater than "Lg" thereby obtaining the same effect discussed above without fail. "Q" is set at less than $3 Lg$, thereby allowing the motor to avoid producing lower output or greater cogging torque produced by an abrupt change of the magnetic field. An opening angle "Am" over the cut-away section or the slit facing to one end of the permanent magnet with regard to the rotor center and an opening angle "As" of stator teeth are adjusted to meet the following relation: "Am" is set at greater than $(1/10)As$ thereby obtaining the same effect discussed above without fail. "Am" is set at less than $(1/4)As$ thereby allowing the motor to avoid producing lower output or greater cogging torque.

When these embodiments are applied to the motor in a sensor-less operation, the structure can be realized inexpensively and yet increase the withstanding force against the demagnetization,

5

CLAIMS

1. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

a relation of $0.3 L_g < L_a \leq 2.0 L_g$ is established,

where L_a is a clearance between teeth of the stator; and

L_g is an air-gap between the stator and a rotor.

2. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

a relation of $2 L_g < L_b < 5 L_g$ is established,

where L_b is a depth of a tooth edge; and

L_g is an air-gap between the stator and a rotor.

3. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

relations of $0.3 L_g < L_a \leq 2.0 L_g$, and $2 L_g < L_b < 5 L_g$ are established,

where L_a is a clearance between teeth of the stator;

L_b is a depth of a tooth edge; and

L_g is an air-gap between the stator and a rotor.

4. A permanent magnet synchronous motor having a stator with a concentrated windings is characterized in that:

an edge of at least one end of a tooth of the stator, the edge facing to a rotor, is cut away, and another side edge to the rotor is protruded for maintaining a depth of a tooth end.

5. The permanent magnet synchronous motor as defined in claim 1 wherein a permanent magnet in the rotor comprises a ferrite magnet.

6. The permanent magnet synchronous motor as defined in claim 1 wherein the stator comprises a divided core.

5 7. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

outer walls on both end sections in a rim direction of a permanent magnet disposed inside a rotor along a rotor rim are tapered inward from the rotor rim in a radial direction and form a recessed section.

10 8. The permanent magnet synchronous motor as defined in Claim 7 wherein a relation of $(1/10)A_s < A_m < (1/4)A_s$ is established,

where " A_m " is an opening angle of a recessed section with regard to a center of the rotor; and

" A_s " is an opening angle of teeth of the stator.

15 9. The permanent magnet synchronous motor as defined in Claim 7 wherein an inner wall of the permanent magnet facing a radial direction is flat face for increasing a depth of a center section of the permanent magnet in the rim direction.

20 10. The permanent magnet synchronous motor as defined in Claim 7 wherein the permanent magnet is mounted on an outer wall of a rotor core, and a recessed section is formed at an open space from where both the end sections of the permanent magnet are cut away in the rim direction.

25 11. The permanent magnet synchronous motor as defined in Claim 7 wherein the permanent magnet is buried in a rotor core along a rotor-core rim, and a cut-away section is formed at a section corresponding to both the end sections of the permanent magnet in the rim direction.

12. The permanent magnet synchronous motor as defined in Claim 7 wherein the permanent magnet is buried in a rotor core along a rotor-core rim, and a slit is formed at a section corresponding to both the end sections of the permanent magnet in the rim direction.

5 13. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

a reversely arced permanent magnet having a curvature-center outside a rotor in a radial direction is buried in a rotor core along a rotor-core rim, and a magnet-end facing to a rotor rim is situated inside the rotor rim in a radial direction, and a slit is formed on the rotor at a section
10 corresponding to the magnet-end.

14. The permanent magnet synchronous motor as defined in Claim 13 wherein a relation of $L_g < Q < 3 L_g$ is established,

where Q is a distance between the end of the permanent magnet and the rotor-core rim; and
15

L_g is an air-gap between the stator and the rotor.

15. The permanent magnet synchronous motor as defined in Claim 13 wherein a relation of $(1/10)A_s < A_m < (1/4)A_s$ is established,

where " A_m " is an opening angle over a width of one of the cut-away section and the slit corresponding to the end of the permanent magnet with regard to a rotor center; and
20

" A_s " is an opening angle of teeth of the stator.

16. The permanent magnet synchronous motor as defined in Claim 1 wherein said motor is driven in a sensor-less operation.
25

17. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 1.

18. The permanent magnet synchronous motor as defined in claim 2 wherein a permanent magnet in the rotor comprises a ferrite magnet.

19. The permanent magnet synchronous motor as defined in claim 3 wherein a permanent magnet in the rotor comprises a ferrite magnet.

20. The permanent magnet synchronous motor as defined in claim 4 wherein a permanent magnet in the rotor comprises a ferrite magnet.

21. The permanent magnet synchronous motor as defined in claim 2 wherein the stator comprises a divided core.

22. The permanent magnet synchronous motor as defined in claim 3 wherein the stator comprises a divided core.

23. The permanent magnet synchronous motor as defined in claim 4 wherein the stator comprises a divided core.

24. The permanent magnet synchronous motor as defined in Claim 2 wherein said motor is driven in a sensor-less operation.

25. The permanent magnet synchronous motor as defined in Claim 3 wherein said motor is driven in a sensor-less operation.

26. The permanent magnet synchronous motor as defined in Claim 4 wherein said motor is driven in a sensor-less operation.

27. The permanent magnet synchronous motor as defined in Claim 7 wherein said motor is driven in a sensor-less operation.

28. The permanent magnet synchronous motor as defined in Claim 8 wherein said motor is driven in a sensor-less operation.

29. The permanent magnet synchronous motor as defined in Claim 9 wherein said motor is driven in a sensor-less operation.

30. The permanent magnet synchronous motor as defined in Claim 10 wherein said motor is driven in a sensor-less operation.

31. The permanent magnet synchronous motor as defined in Claim 11 wherein said motor is driven in a sensor-less operation.

32. The permanent magnet synchronous motor as defined in Claim 12 wherein said motor is driven in a sensor-less operation.

33. The permanent magnet synchronous motor as defined in Claim 13 wherein said motor is driven in a sensor-less operation.

34. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 2.

35. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 3.

36. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 4.

37. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 7.

38. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 8.

39. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 9.

40. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 10.

41. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 11.

42. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 12.

43. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 13.

44. A permanent magnet synchronous motor having a stator with a concentrated winding is characterized in that:

a reversely arced permanent magnet having a curvature-center outside a rotor in radial direction is buried in a rotor core along a rotor-core rim, and a magnet-end facing to a rotor rim is situated inside the rotor rim in a radial direction, and a slit is formed on the rotor at a section corresponding to the magnet-end.

45. The permanent magnet synchronous motor as defined in Claim 44 wherein a relation of $L_g < Q < 3 L_g$ is established,

where Q is a distance between the end of the permanent magnet and the rotor-core rim; and

Lg is an air-gap between the stator and the rotor.

46. The permanent magnet synchronous motor as defined in Claim 44 wherein a relation of $(1/10)A_s < A_m < (1/4)A_s$ is established,

5 where "Am" is an opening angle over a width of one of the cut-away section and the slit corresponding to the end of the permanent magnet with regard to a rotor center; and "As" is an opening angle of teeth of the stator.

47. The permanent magnet synchronous motor as defined in Claim 44 wherein said motor
10 is driven in a sensor-less operation.

48. A compressor used in one of an air-conditioner and an electric refrigerator driven by the motor as defined in Claim 44.

ABSTRACT

The present invention provides a permanent-magnet-synchronous-motor having a stator with concentrating windings with the following structure so that permanent magnet (6) is hard to subjected to demagnetization magnetic field: $0.3 L_g < L_a \leq 2.0 L_g$, where L_a is a clearance between teeth of stator (1), and L_g is an air-gap between stator (1) and rotor (2), and yet outer walls of both ends of the permanent magnet (6) disposed within rotor (2) in a rim direction are tapered toward inside from a rotor rim in a radial direction and thus form recessed section on the outer walls of the magnets. As a result, withstanding force against demagnetization is expected to increase.

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	





FIG. 2

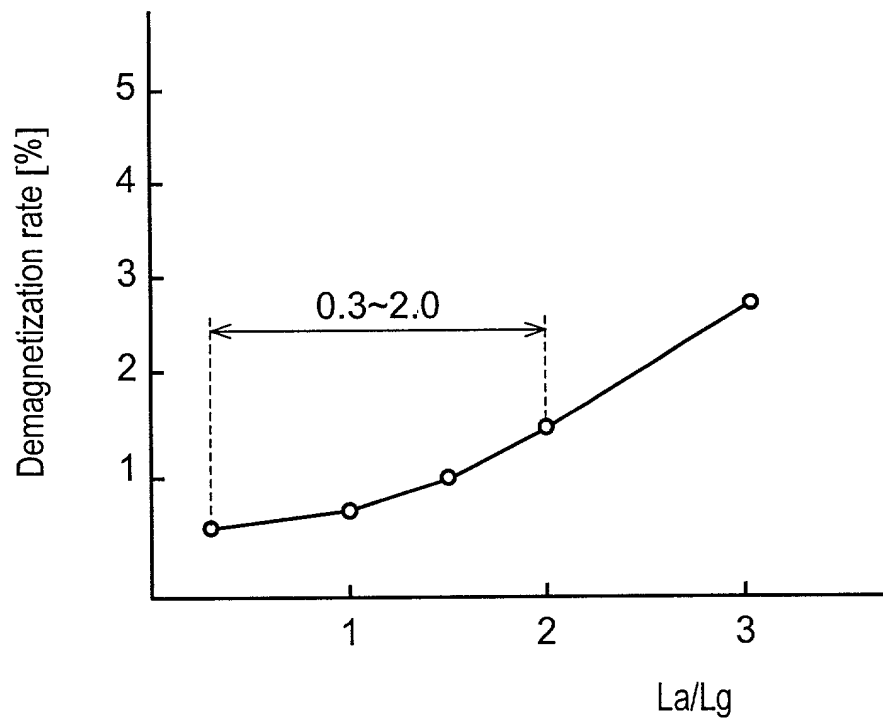


FIG. 3

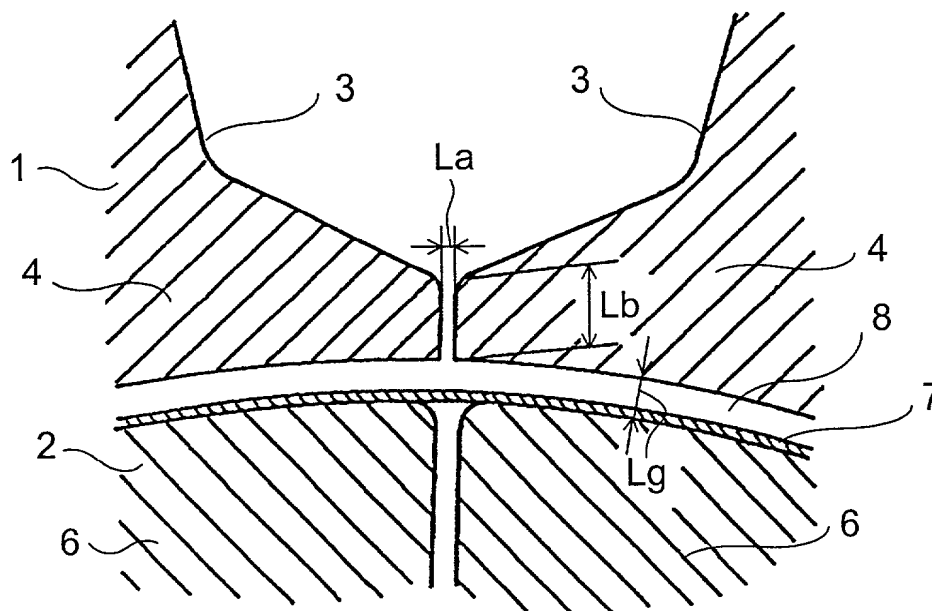


FIG. 4


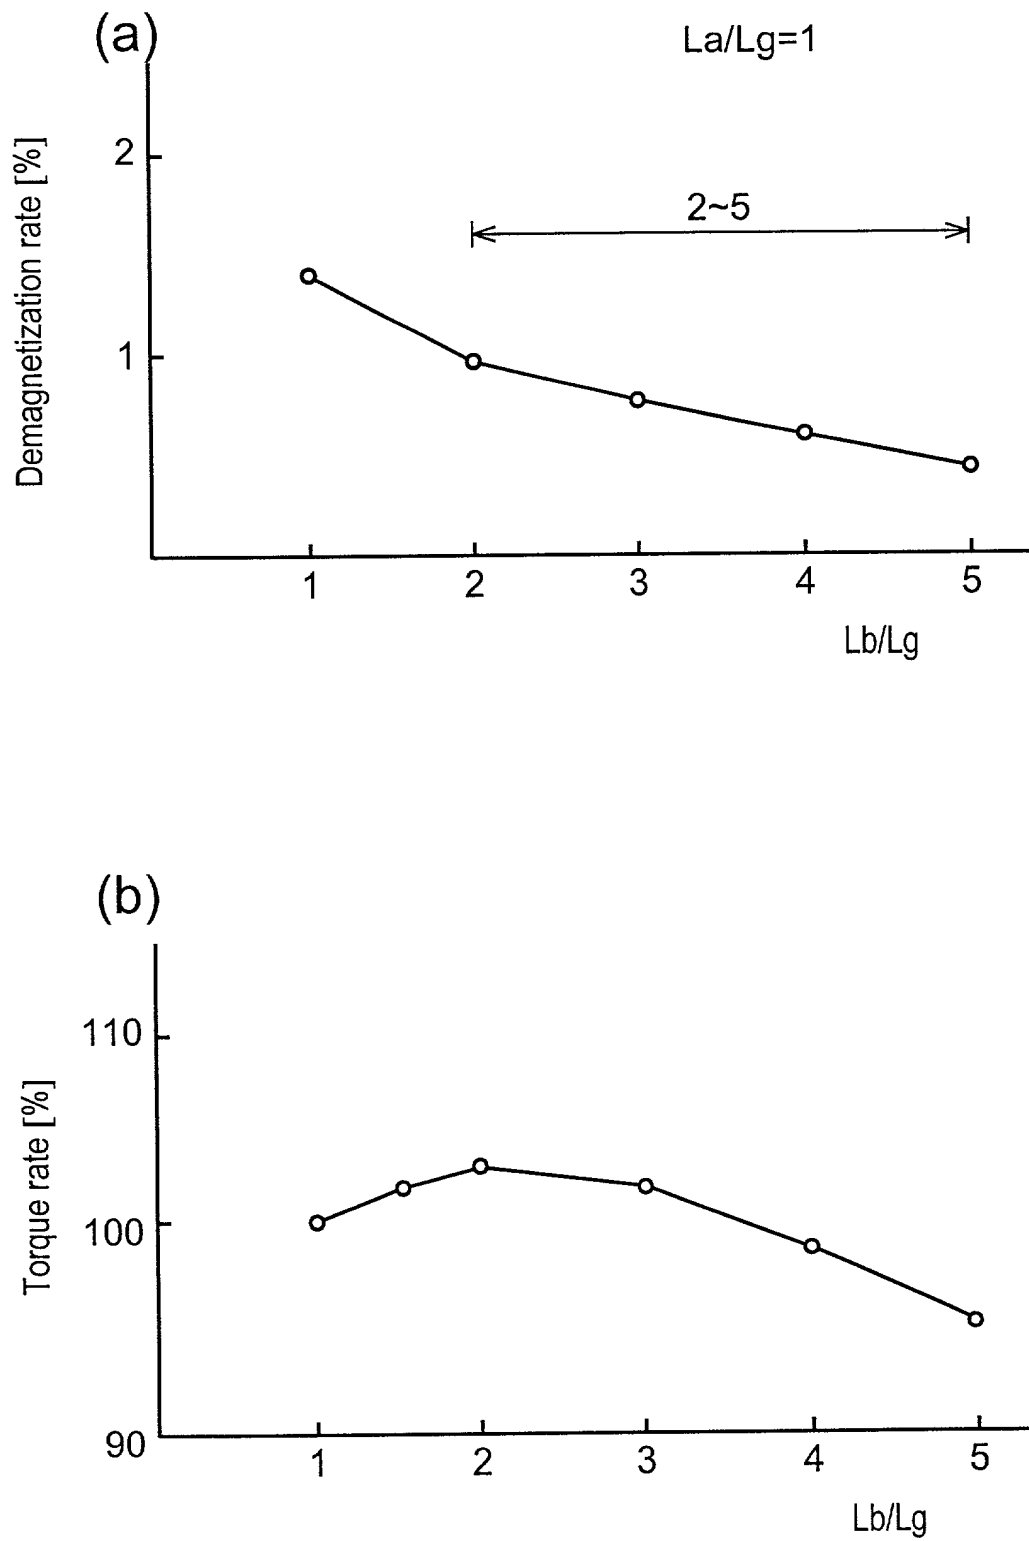


FIG. 5

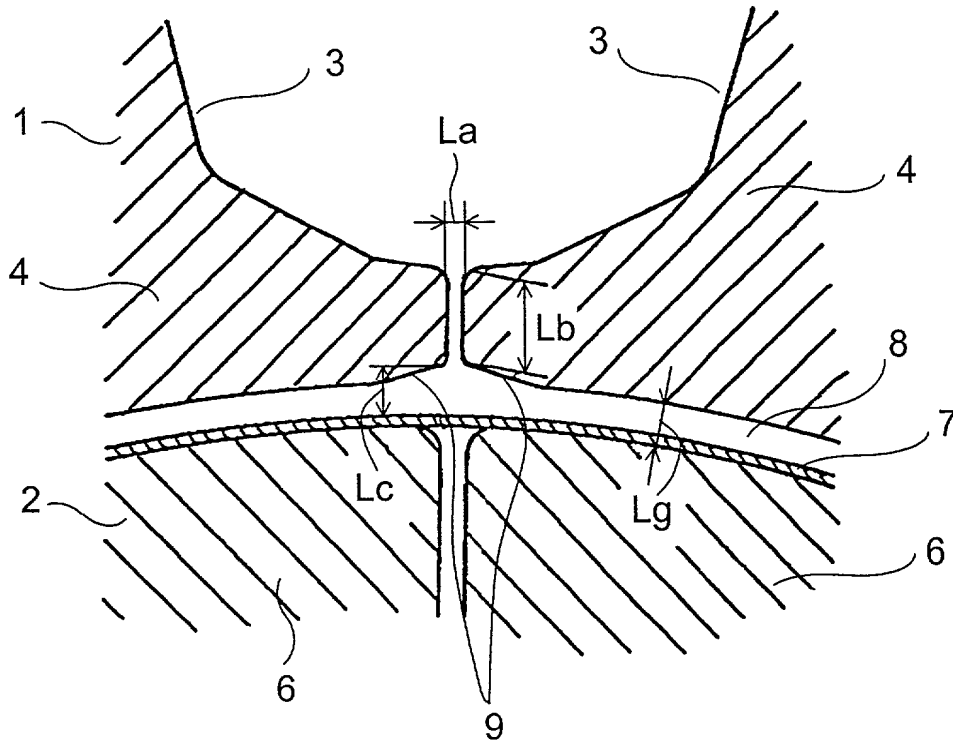



[illegible]

FIG. 7

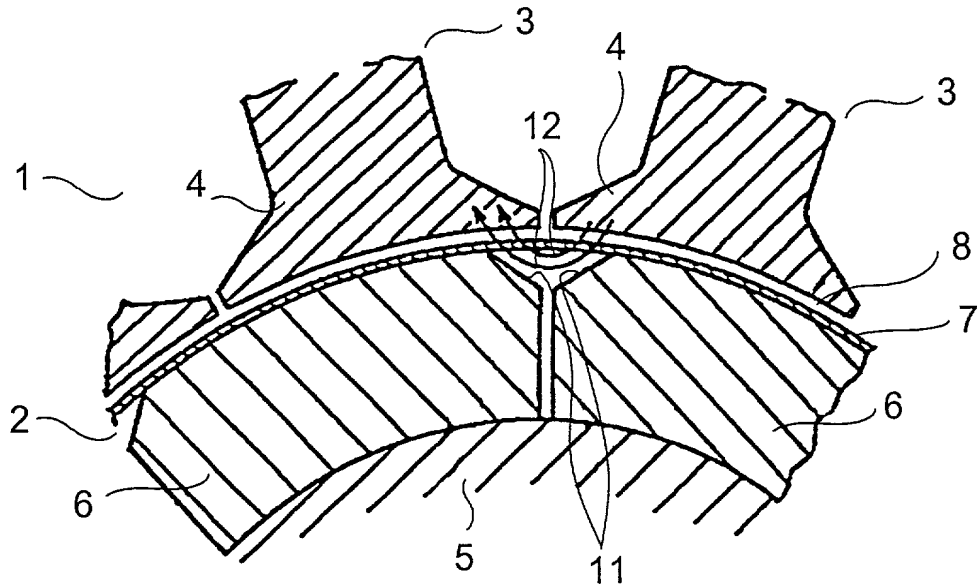


FIG. 8

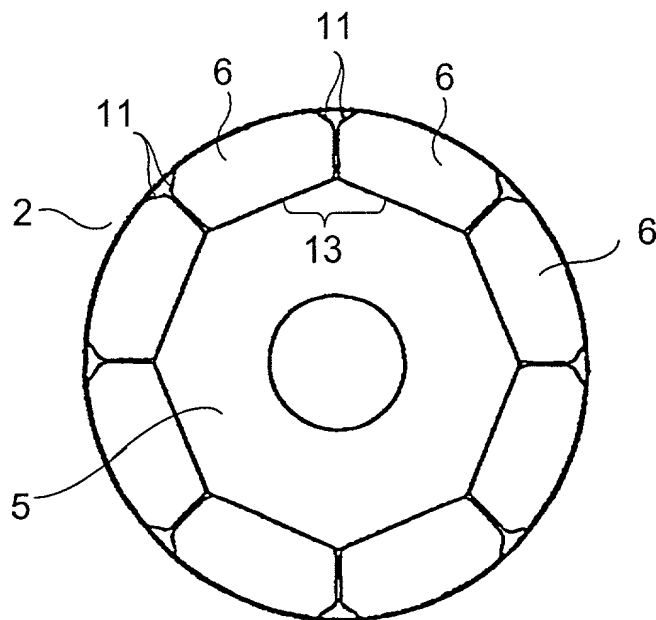


FIG. 9

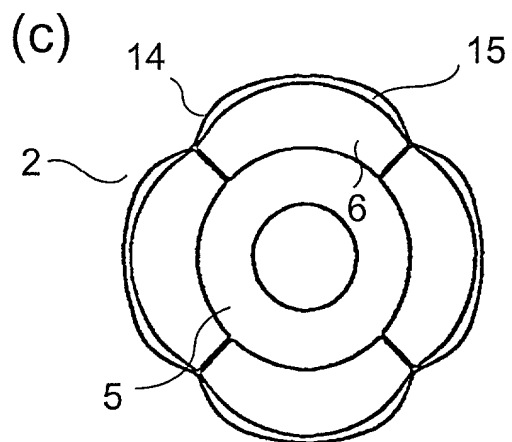
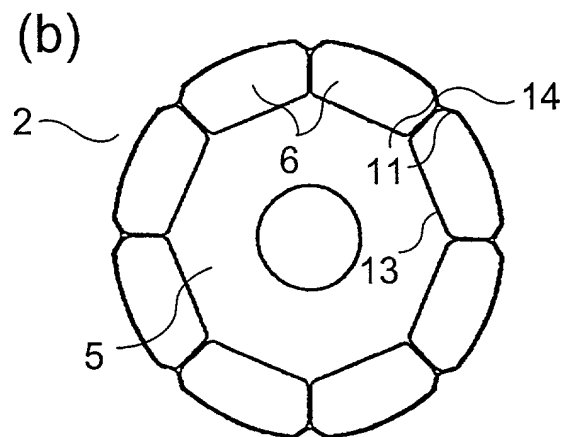

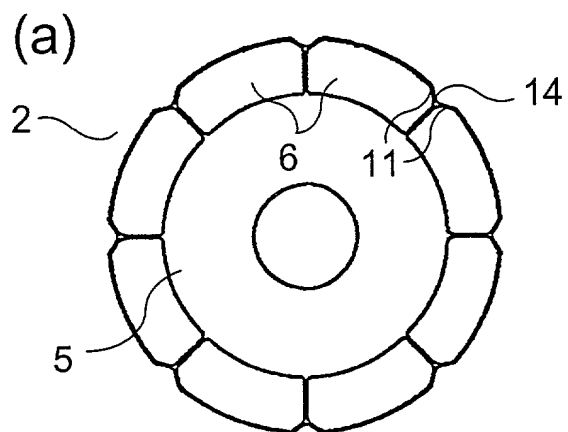


FIG. 10

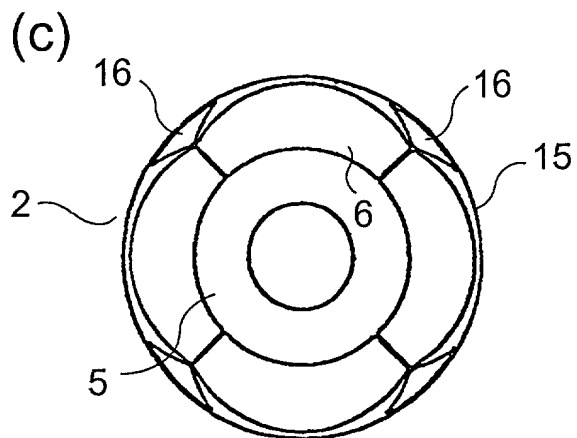
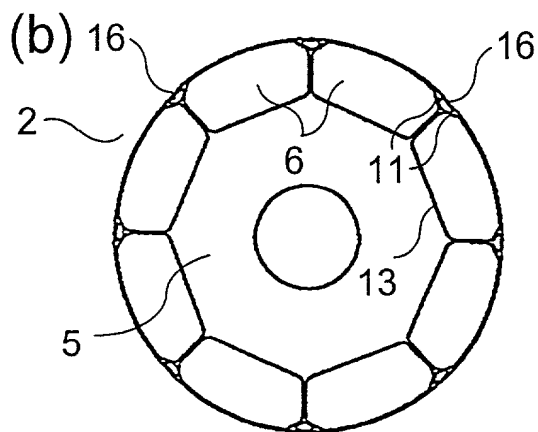

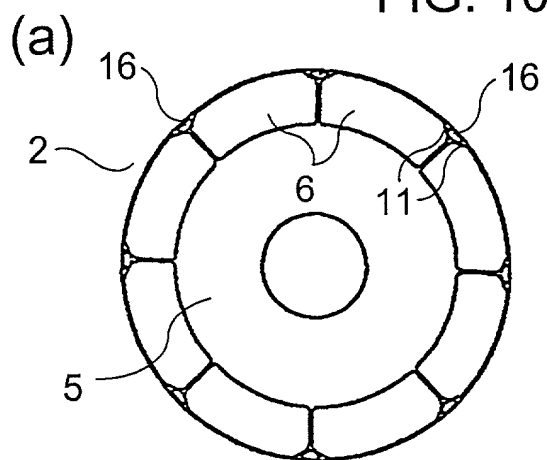


FIG. 11

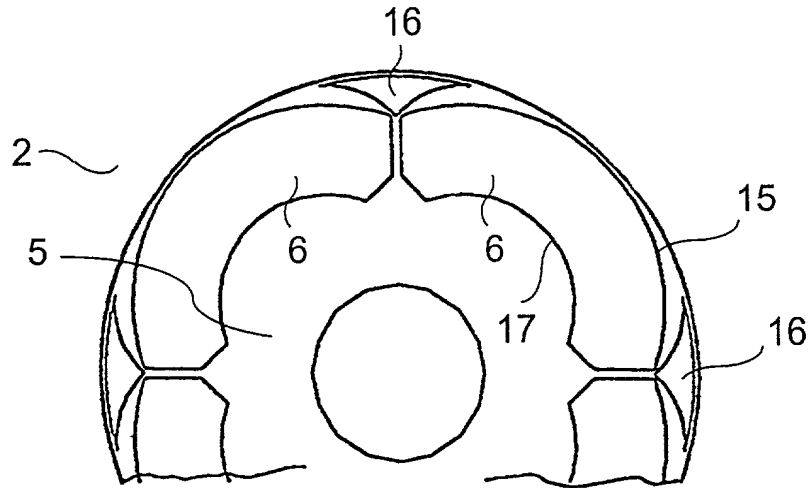


FIG. 12

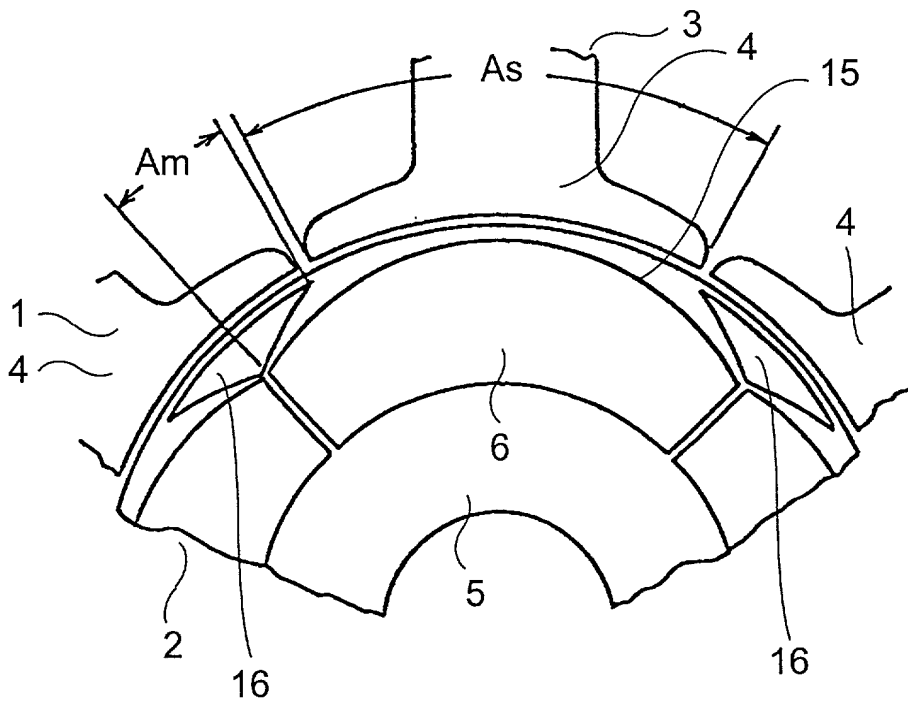


FIG. 13

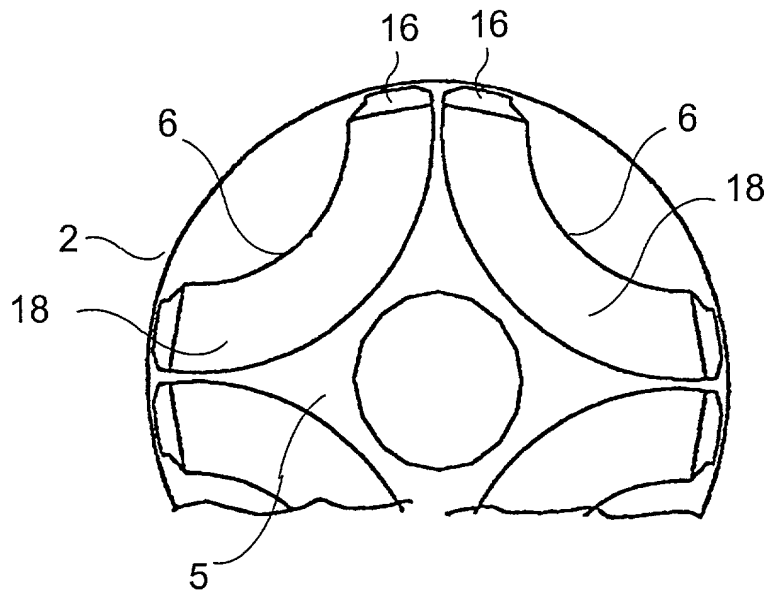


FIG. 14

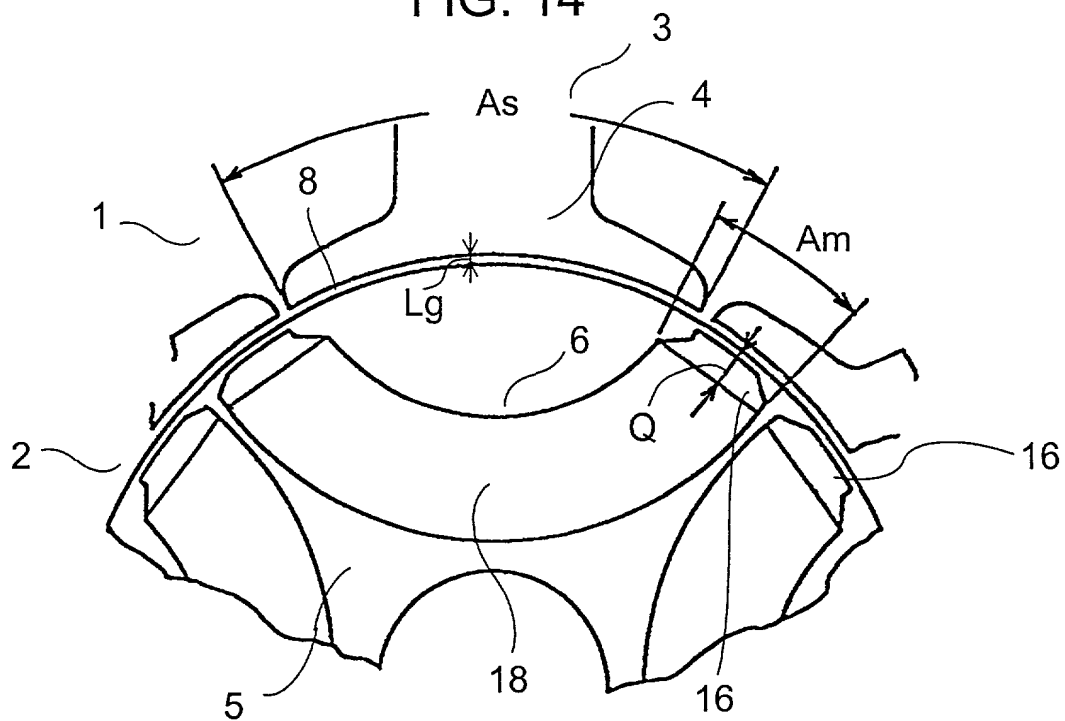


FIG. 15

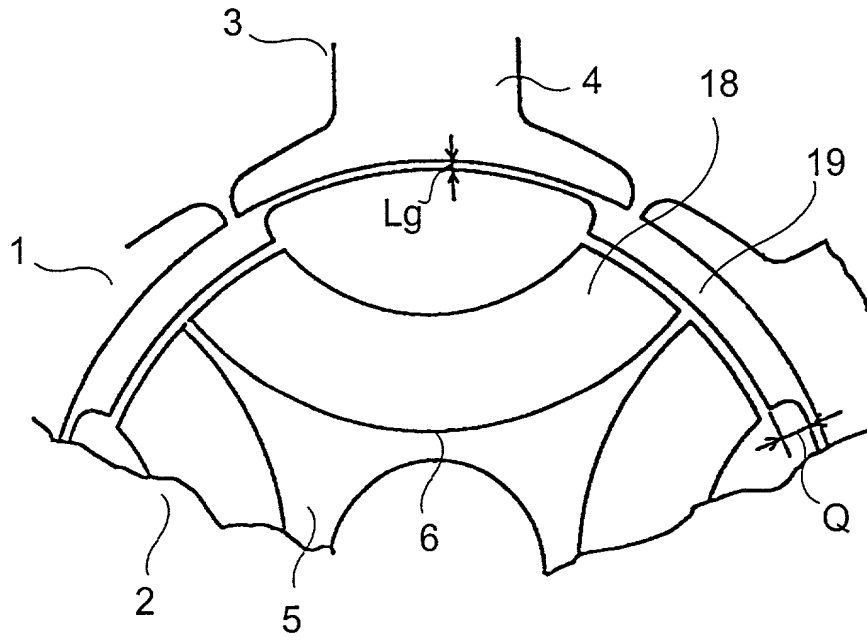


FIG. 16


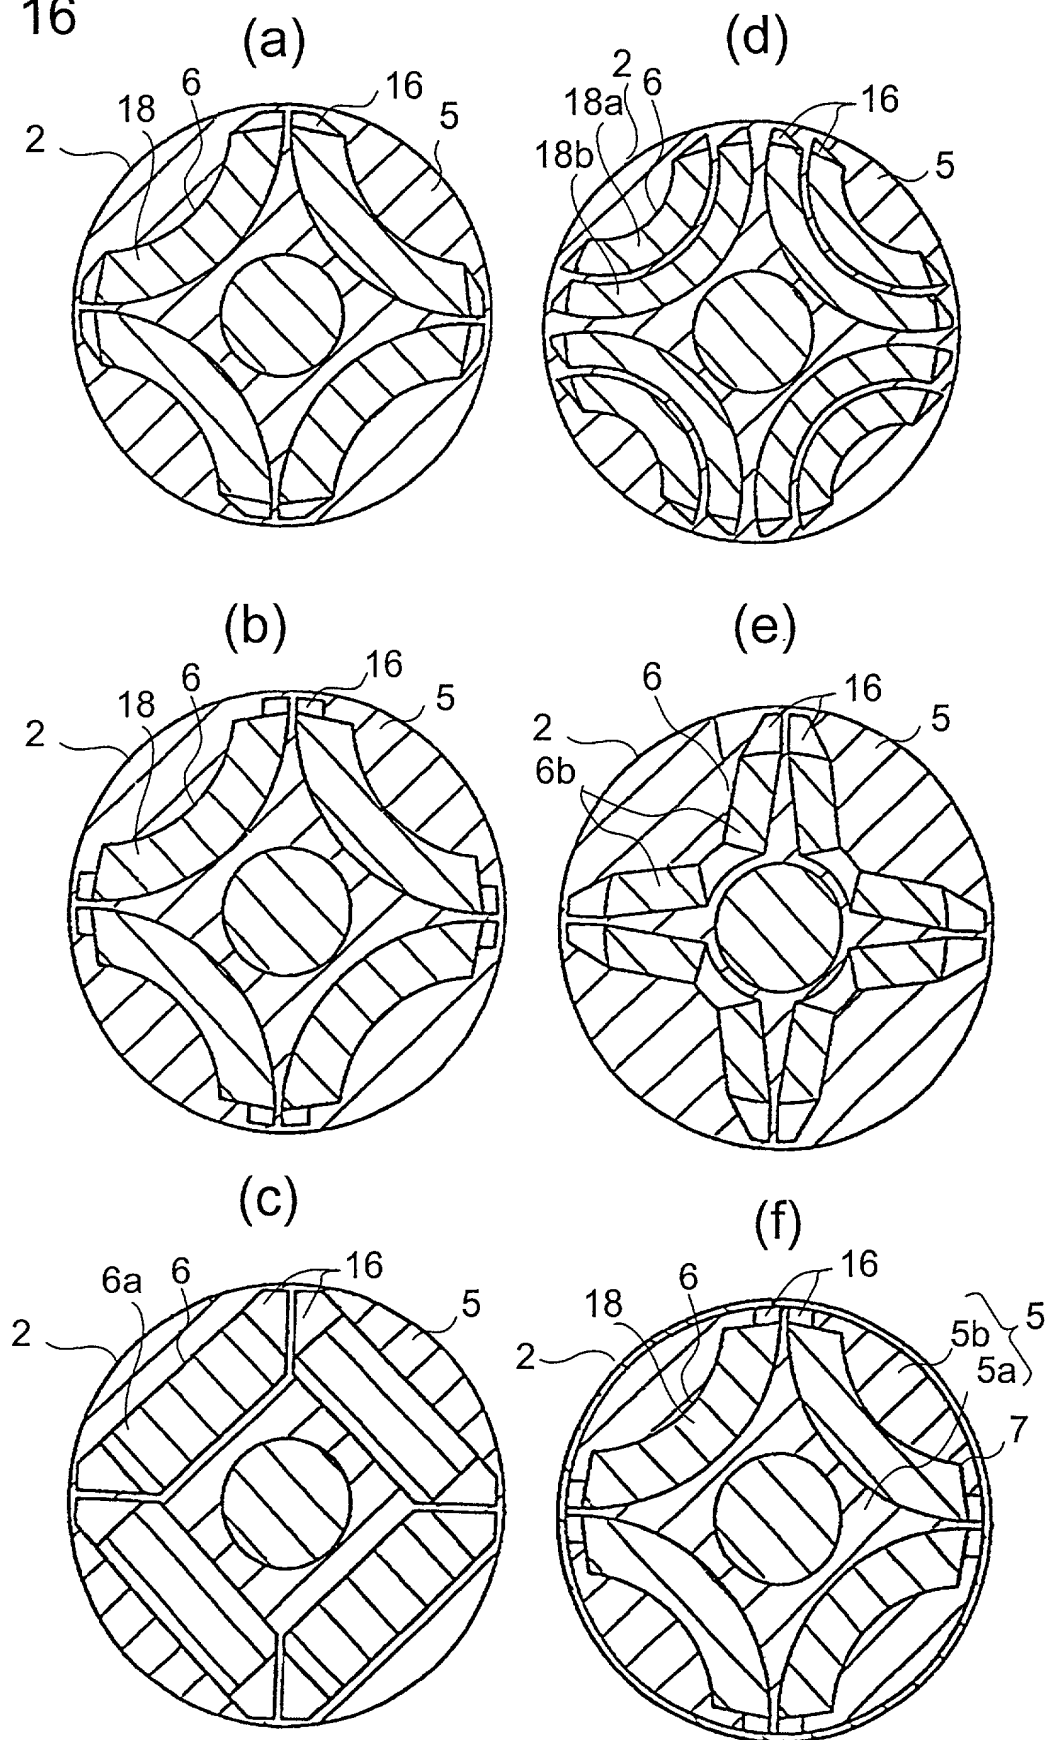


FIG. 17

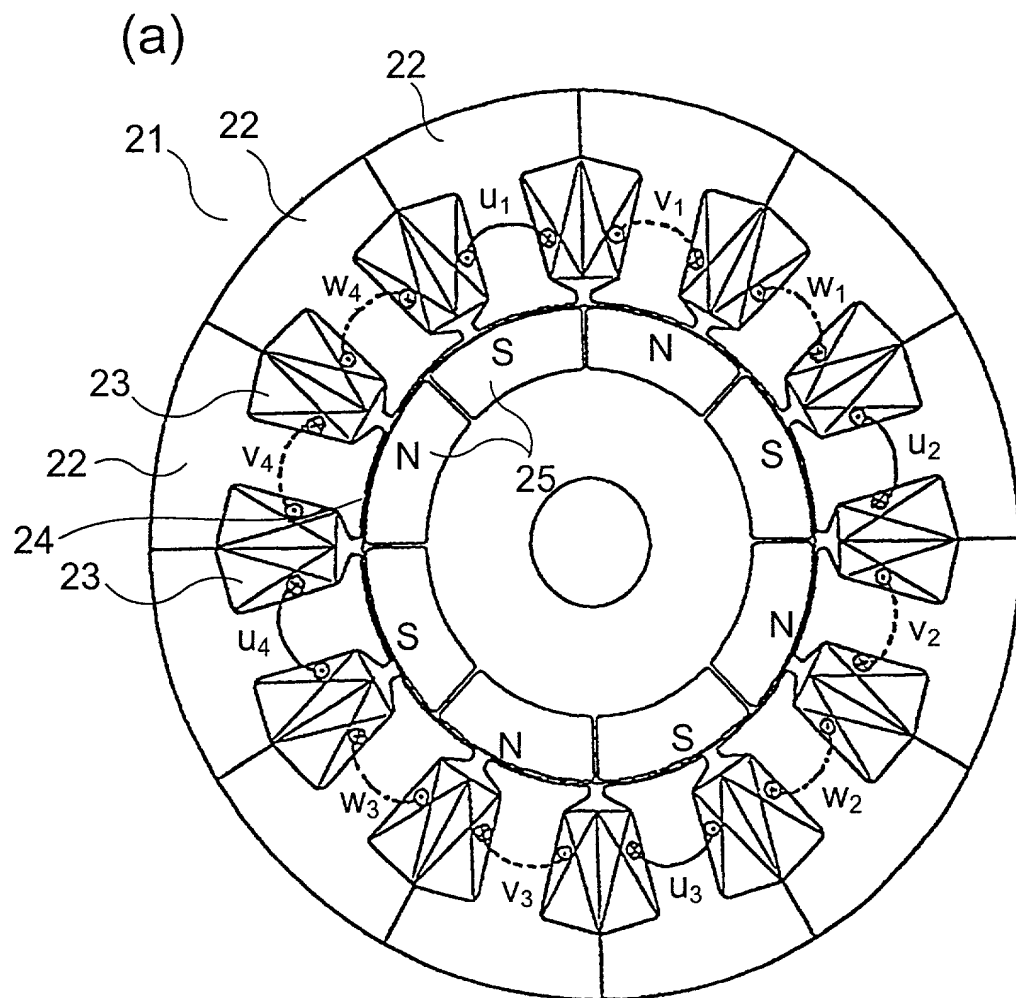

(b)

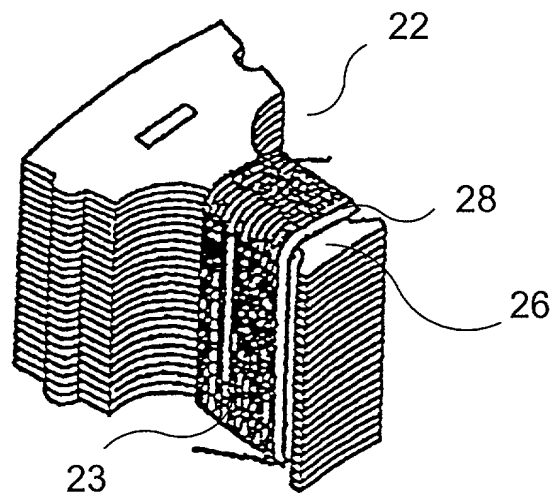


FIG. 18

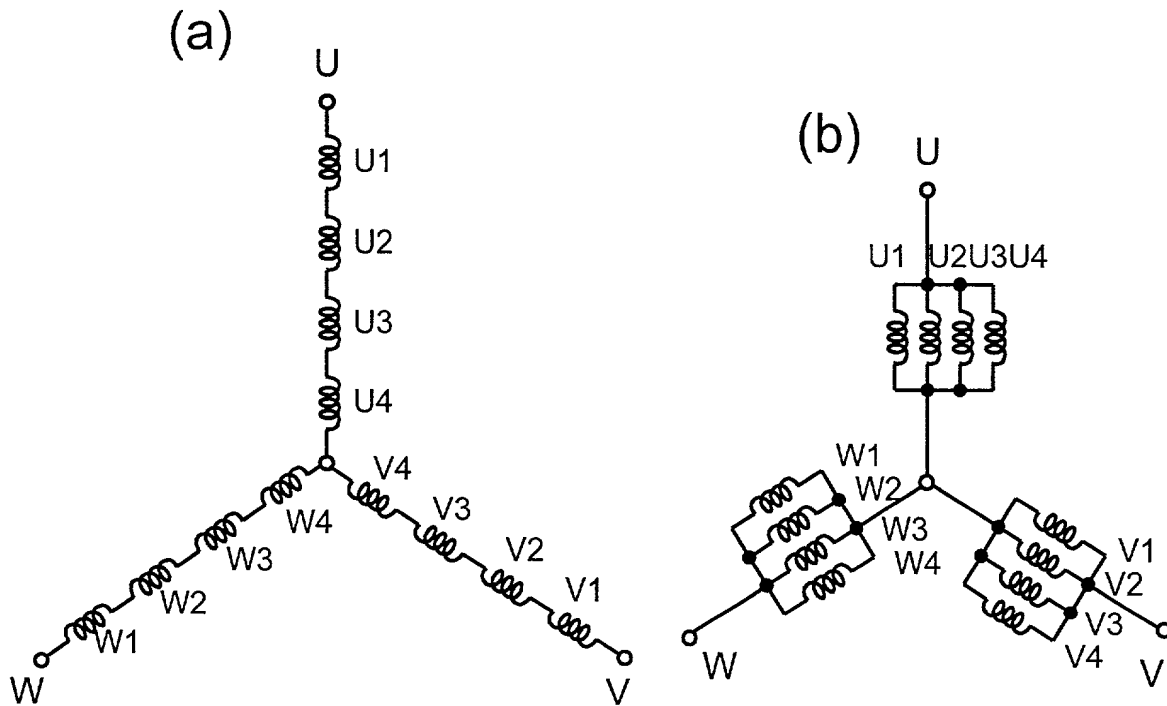


FIG. 19

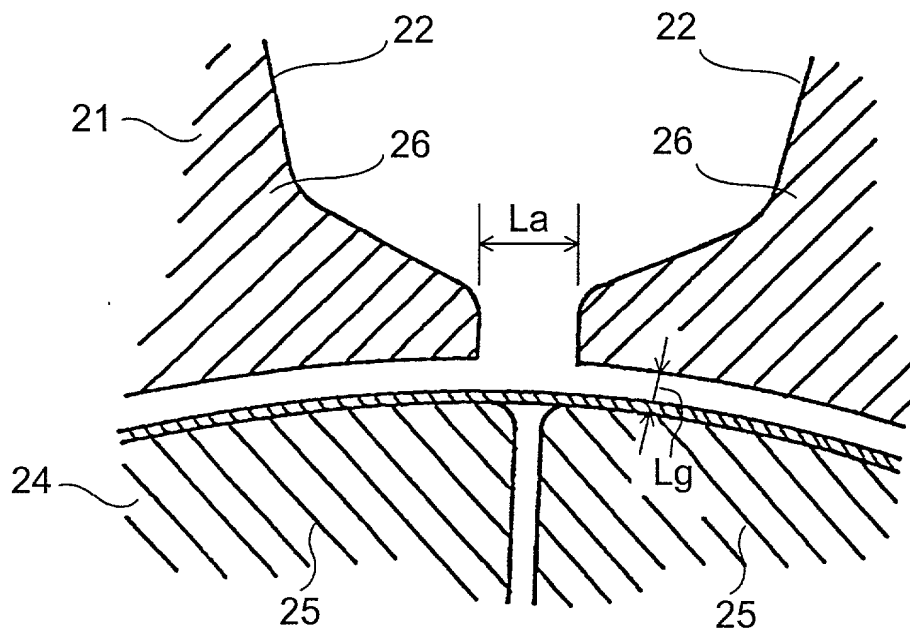


FIG. 20



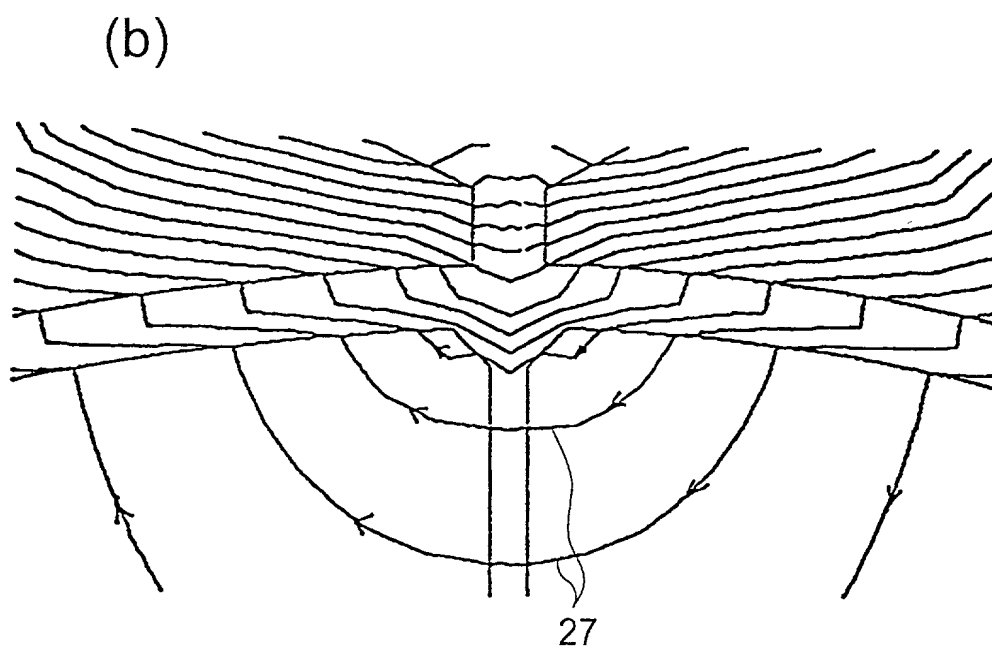


FIG. 21

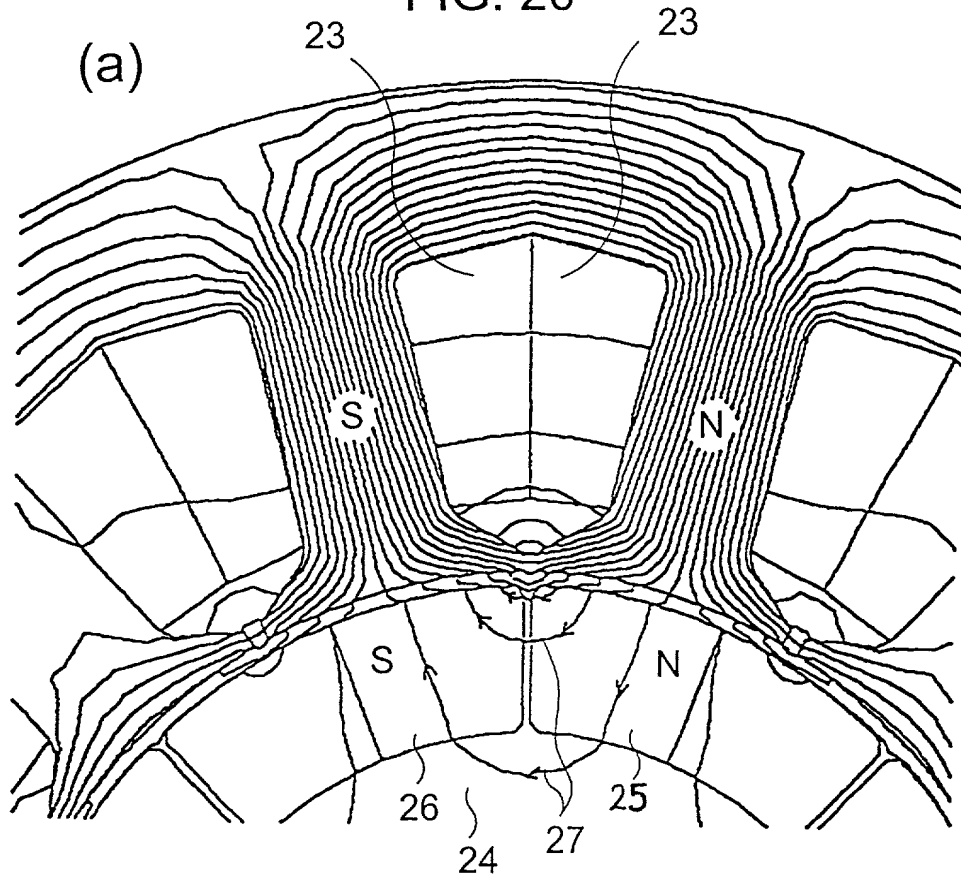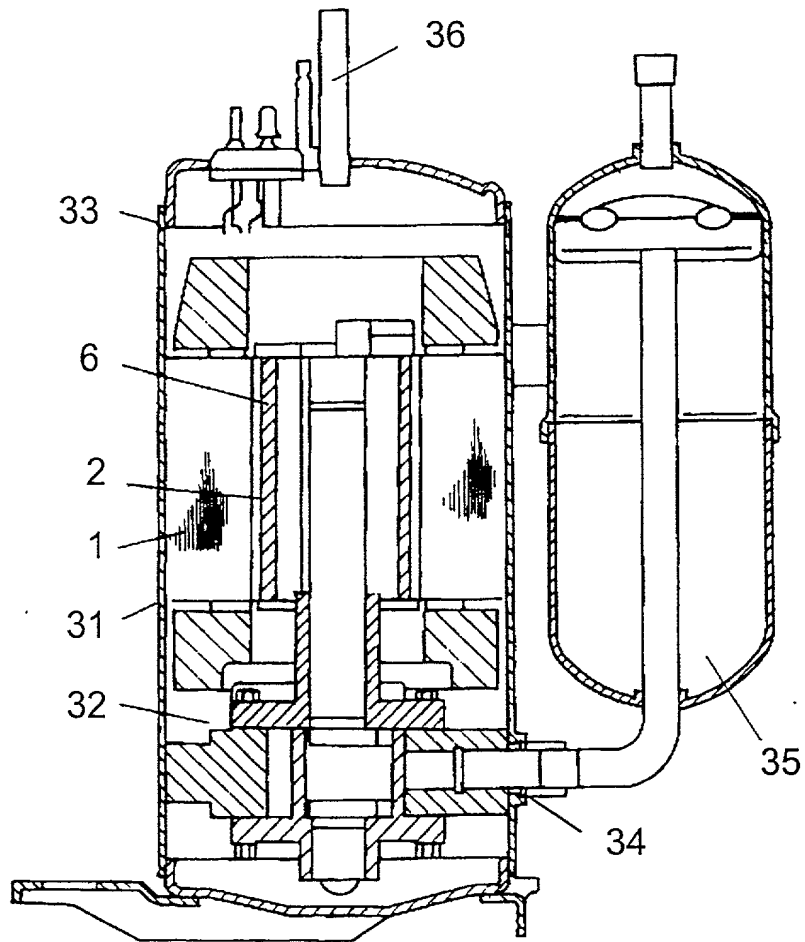

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(X) Original () Supplemental () Substitute () PCT () DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: PERMANENT MAGNET SYNCHRONOUS MOTOR

of which is described and claimed in:

- () the attached specification, or
 (X) the specification in application Serial No. , filed March 7, 2000, and with amendments through (if applicable), or
 () the specification in International Application No., filed , and as amended on (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	9-242939	September 8, 1997	yes
Japan	9-242940	September 8, 1997	yes

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Noltan, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from Matsushita Electric Industrial Co., Ltd. as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, D.C. 20006

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:
Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME Murakami	FIRST GIVEN NAME Hiroshi	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS B20-209, Takanodai 1-5, Suita-shi, Osaka 565-0861	CITY Osaka	STATE OR COUNTRY Japan
Full Name of Second Inventor	FAMILY NAME Honda	FIRST GIVEN NAME Yukio	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 7-1-3, Kisabe, Katano-shi, Osaka 576-0052	CITY Katano-shi	STATE OR COUNTRY Japan
Full Name of Third Inventor	FAMILY NAME Yokote	FIRST GIVEN NAME Shizuka	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 1-7-3-101, Daidominami, Higashiyodogawa-ku, Osaka-shi, Osaka 533-0012	CITY Osaka-shi	STATE OR COUNTRY Japan
Full Name of Fourth Inventor	FAMILY NAME Asano	FIRST GIVEN NAME Yoshinari	SECOND GIVEN NAME
Residence & Citizenship	CITY Fukui	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 2-9-23-208, Komatsu, Tekefu-shi, Fukui 915-0816	CITY Tekefu-shi	STATE OR COUNTRY Japan
Full Name of Fifth Inventor	FAMILY NAME Wada	FIRST GIVEN NAME Yukitoshi	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 13-3, Kisabe 4-chome, Katano-shi, Osaka 576-0052	CITY Katano-shi	STATE OR COUNTRY Japan
Full Name of Sixth Inventor	FAMILY NAME Hirose	FIRST GIVEN NAME Hideo	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 6-22, Higashikorimotomachi, Hirakata-shi, Osaka 573-0076	CITY Hirakata-shi	STATE OR COUNTRY Japan

Full Name of Sixth Inventor	FAMILY NAME Matsushita	FIRST GIVEN NAME Yasuaki	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 5-2-207, Myoukenzaka, Katano-shi, Osaka	CITY Osaka	STATE OR COUNTRY 576-0021 Japan

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor _____ Date _____
Hiroshi MURAKAMI

2nd Inventor _____ Date _____
Yukio HONDA

3rd Inventor _____ Date _____
Shizuka YOKOTE

4th Inventor _____ Date _____
Yoshinari ASANO

5th Inventor _____ Date _____
Yukitoshi WADA

6th Inventor _____ Date _____
Hideo HIROSE

7th Inventor _____ Date _____
Yasuaki MATSUSHITA

The above application may be more particularly identified as follows:

U.S. Application Serial No. NEW Filing Date March 7, 2000

Applicant Reference Number P16954-02(I.S.Nakano) Atty Docket No. 00169/P16954-02(I.S.Nakano)

Title of Invention PERMANENT MAGNET SYNCHRONOUS MOTOR